




BREWERY UPE

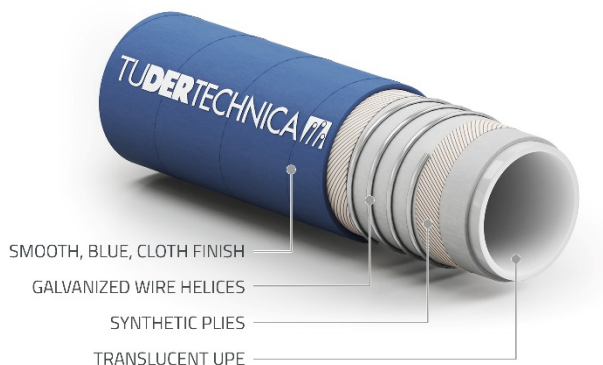

TECHNICAL CHARACTERISTICS

Temperature range : -35°C / +100°C (-31°F / +212°F)

Norm : ISO 1307 for dimensional tolerances



Suction and delivery hose suitable for beer, alcohol concentration up to 96% and a wide range of food products with an improved resistance to higher pressure.

DESCRIPTION

Tube

UPE, translucent, phthalates free, tested in compliance with 1907/2006/CE (REACH). Meets FDA 21 CFR 177.1520, BfR CAT III, DM 21.03.73 e seguenti, EUROPEAN REGLEMENT 1935/2004/CE, AND 10/2011/CE, JAPAN-Ministry of Health and Welfare Notice No.370,1959 and No.201, 2006

Reinforcement

synthetic plies, galvanized wire helices

Cover

smooth, blue, abrasion, ageing and ozone resistant, cloth finish

Sterilization

refer to guidelines for cleaning and sanitizing

Marking

BREWERY UPE

Inside diameter		Outside diameter		Vacuum		Working pressure		Burst pressure		Appr. weight		Bending radius	
[mm]	[in]	[mm]	[in]	[bar]	[psi]	[bar]	[psi]	[bar]	[psi]	[kg/mt]	[lbs/ft]	[mm]	[in]
38	1,50	51	2,00	0,9	13	16	250	48	750	1,34	0,90	240	9,45
50	1,97	64	2,52	0,9	13	16	250	48	750	1,84	1,23	330	12,99
51	2,00	64	2,52	0,9	13	16	250	48	750	1,72	1,15	330	12,99
63,5	2,50	81	3,19	0,9	13	16	250	48	750	3,06	2,05	415	16,34
65	2,56	81	3,19	0,9	13	16	250	48	750	2,92	1,96	415	16,34
75	2,95	93	3,66	0,9	13	16	250	48	750	3,70	2,48	500	19,69
76	3,00	93	3,66	0,9	13	16	250	48	750	3,50	2,35	500	19,69
100	3,94	119	4,69	0,9	13	16	250	48	750	5,12	3,43	675	26,57
102	4,00	119	4,69	0,9	13	16	250	48	750	4,78	3,20	675	26,57

Other diameters, wall thickness and pressure only on specific request. Data refer to ambient temperature (20°C).