




MILKFLEX®

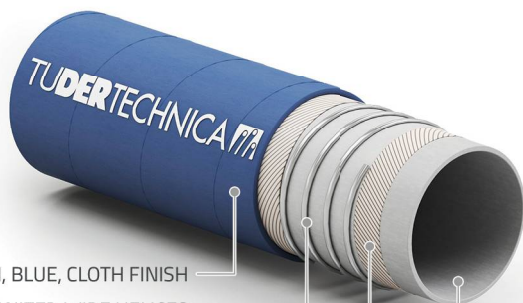

SMOOTH, BLUE, CLOTH FINISH

GALVANIZED WIRE HELICES

SYNTHETIC PLYS

WHITE NR

TECHNICAL CHARACTERISTICS

Temperature range : -40°C / +80°C (-40°F / +176°F)

Norm : ISO 1307 for dimensional tolerances



Light and flexible lorry collecting hose suitable for milk and milk by-products.

DESCRIPTION

Tube

NR, white, phthalates free, tested in compliance with 1907/2006/CE (REACH). Meets FDA 21 CFR 177.2600, BFR recommendation XXI cat 2, DM 21.03.73 e seguenti, EUROPEAN REGLEMENT 1935/2004/CE, JAPAN-Ministry of Health and Welfare Notice No.370,1959 and No.201,2006

Reinforcement

synthetic plies, galvanized wire helices

Cover

smooth, blue, abrasion, ageing and ozone resistant, cloth finish

Sterilization

refer to guidelines for cleaning and sanitizing

Marking

MILKFLEX®

Inside diameter		Outside diameter		Vacuum		Working pressure		Burst pressure		Appr. weight		Bending radius	
[mm]	[in]	[mm]	[in]	[bar]	[psi]	[bar]	[psi]	[bar]	[psi]	[kg/mt]	[lbs/ft]	[mm]	[in]
25	1,00	36	1,42	0,9	13	6	90	18	270	0,72	0,48	75	2,95
32	1,25	43	1,69	0,9	13	6	90	18	270	0,88	0,59	95	3,74
38	1,50	50	1,97	0,9	13	6	90	18	270	1,20	0,80	115	4,53
51	2,00	63	2,48	0,9	13	6	90	18	270	1,54	1,03	150	5,91
63,5	2,50	75,5	2,97	0,9	13	6	90	18	270	1,98	1,33	190	7,48
76	3,00	90	3,54	0,9	13	6	90	18	270	2,76	1,85	230	9,06
102	4,00	116	4,57	0,9	13	6	90	18	270	3,78	2,53	300	11,81

Data refer to ambient temperature (20°C). Other diameters, wall thickness, cover colours and pressure only on specific request